




# ELOQUENCE®

*Maison Fondée en 2002*




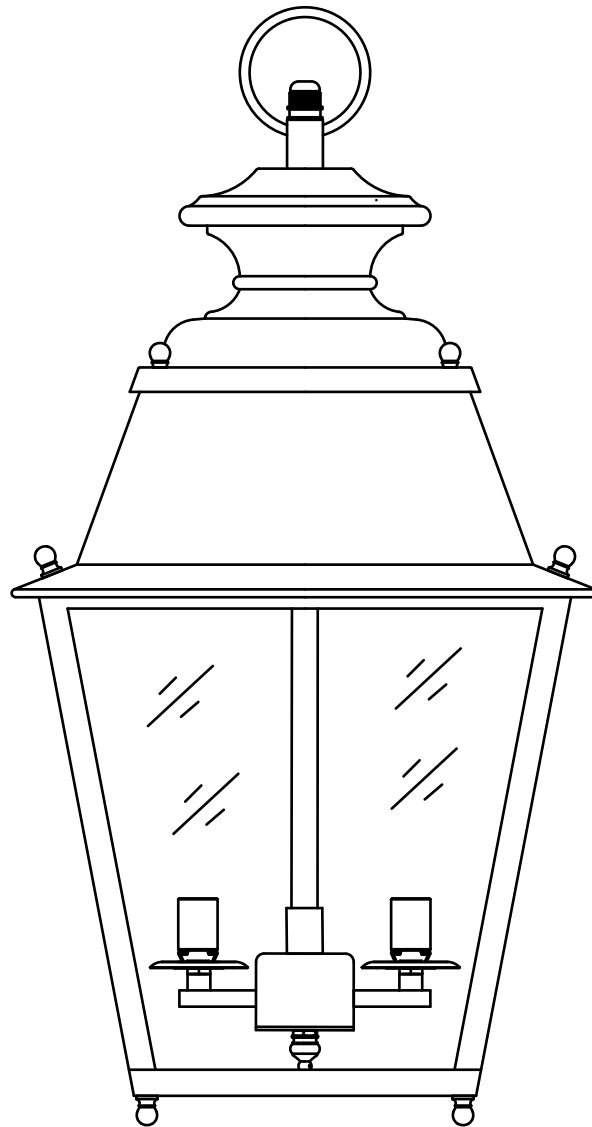








ST. GERMAIN LANTERN  
Assembly Instructions & Care




# ELOQUENCE®

## HARDWARE & ELECTRICAL INSTRUCTIONS

### PARTS ENCLOSED

ITEMS	DIAGRAM	DESCRIPTION	QTY.
(A)		Junction Box (Not included) SOL.B. MIN.FIXTURE RATED	1
(B)		Mounting Screws (Not included)	2 Sets
(C1)		Ceiling Mounting Plate	1
(C2)		Canopy	1
(C3)		Screw Nut	2
(D1)		Quick link	1
(D2)		Chain	1
(D3)		Quick link	1
(E)		Wire Nut	3
(F)		Bulb	4
(G)		Candle Sleeve	4
(H)		Body	1

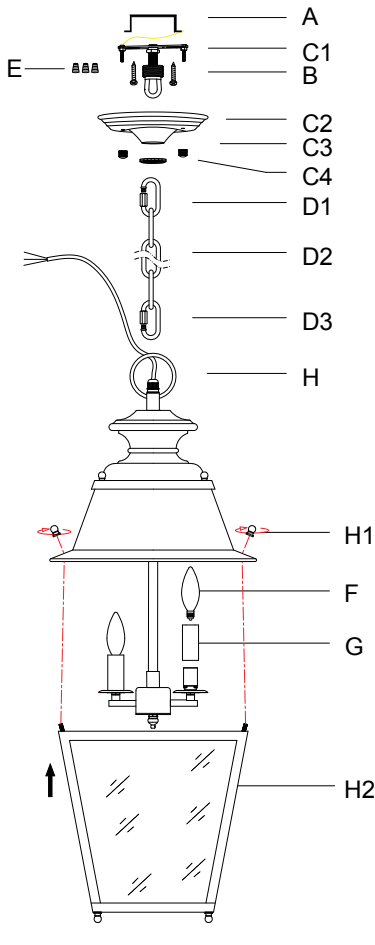

### IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial-type applications of very heavy chandeliers.
2. This fixture has been rated for 4 x 4-watt maximum E12 standard LED bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light at least a ceiling capacity of 49.5kg (109.13lb) is required.
5. The manufacturer and distributor accepts no liability for incorrect installation.
6. For indoor use only.
7. Keep away from children.

### Warnings:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

### PRODUCT DESCRIPTION:

General material: Glass & Iron  
 Height: 68.5 cm (27.0in)  
 Length : 36.0 cm (14.17in)  
 Width: 36.0 cm (14.17in)  
 Weight: 9.9kg (21.83lb)  
 Grounded / Hardwired

### TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the ceiling light will be installed.
3. Loosen screw cap (H1) from body (H) and metal frame (H2) .
4. Unlock the quick link (D3) at the opposite end of the chain (D2) to attach the body (H).
5. Loosen the Screw nut (C3)/(C4) and remove the ceiling plate (C1) or from the Canopy (C2).
6. Attach the ceiling plate (C1) to the ceiling with mounting screws (B).
7. Insert quick link (D1) into canopy (C2)/(C4). Unlock the quick link (D1) to attach ceiling mounting plate (C1).
8. The grounding wire from the outlet box shall also wrap round the green headed grounding terminal on the ceiling hock (C1) and wrap the connection with electrical tape. Connect the hot wire to the hot junction box wire (A) (Usually black or smooth) with a plastic wire nut (E) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (A) (Usually white or ribbed) with a plastic wire nut (E) and wrap the connection with electrical tape.
9. Move the canopy (C2) up to the ceiling, then fasten the Screw Nut (C3)/(C4).
10. Cover lampholders with candle sleeves (G).
11. Fasten lightbulbs (F) to the lampholders.
12. Fix metal frame (H2) to body (H) with screw cap (H1) .
13. Restore power to the junction box and test ceiling light fixture.

### CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced: If the cable is damaged, do not use the light.

### ENVIRONMENT:

Special waste handling may be required. Please contact your local authorities for more information.

## CARE INSTRUCTIONS

To clean, wipe with a soft, dry cloth. Avoid the use of harsh chemicals or abrasive cleaners.

UL Listed, 40 watt max voltage.

Do not exceed wattage.

---



ELOQUENCE®

*Maison Fondée en 2002*

WWW.ELOQUENCE.COM  
3601 Holdrege Ave.  
Los Angeles, CA 90016  
T: 310-876-0661 F: 310-876-0667  
E: INFO@ELOQUENCE.COM