




ELOQUENCE®


Maison Fondée en 2002

ALBERTINA CHANDELIER Assembly Instructions & Care

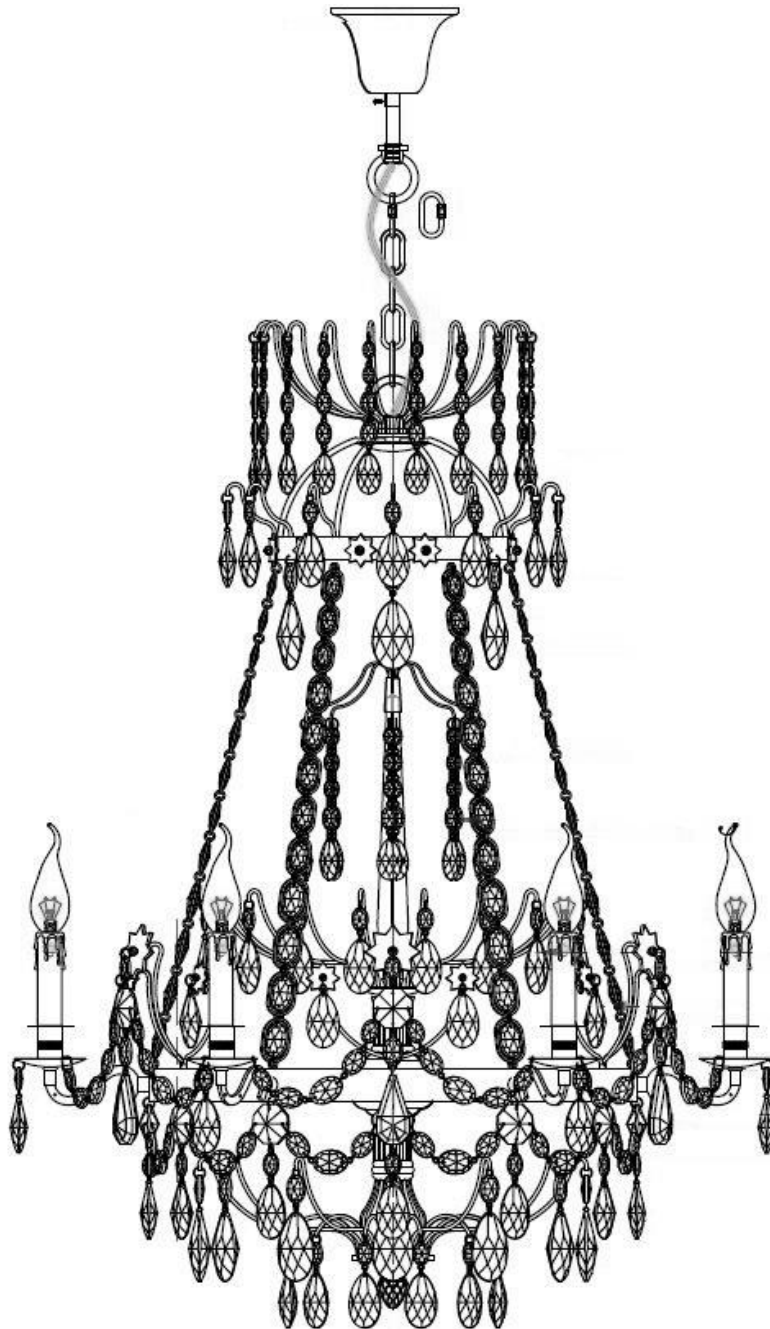

ELOQUENCE®

HARDWARE & ELECTRICAL

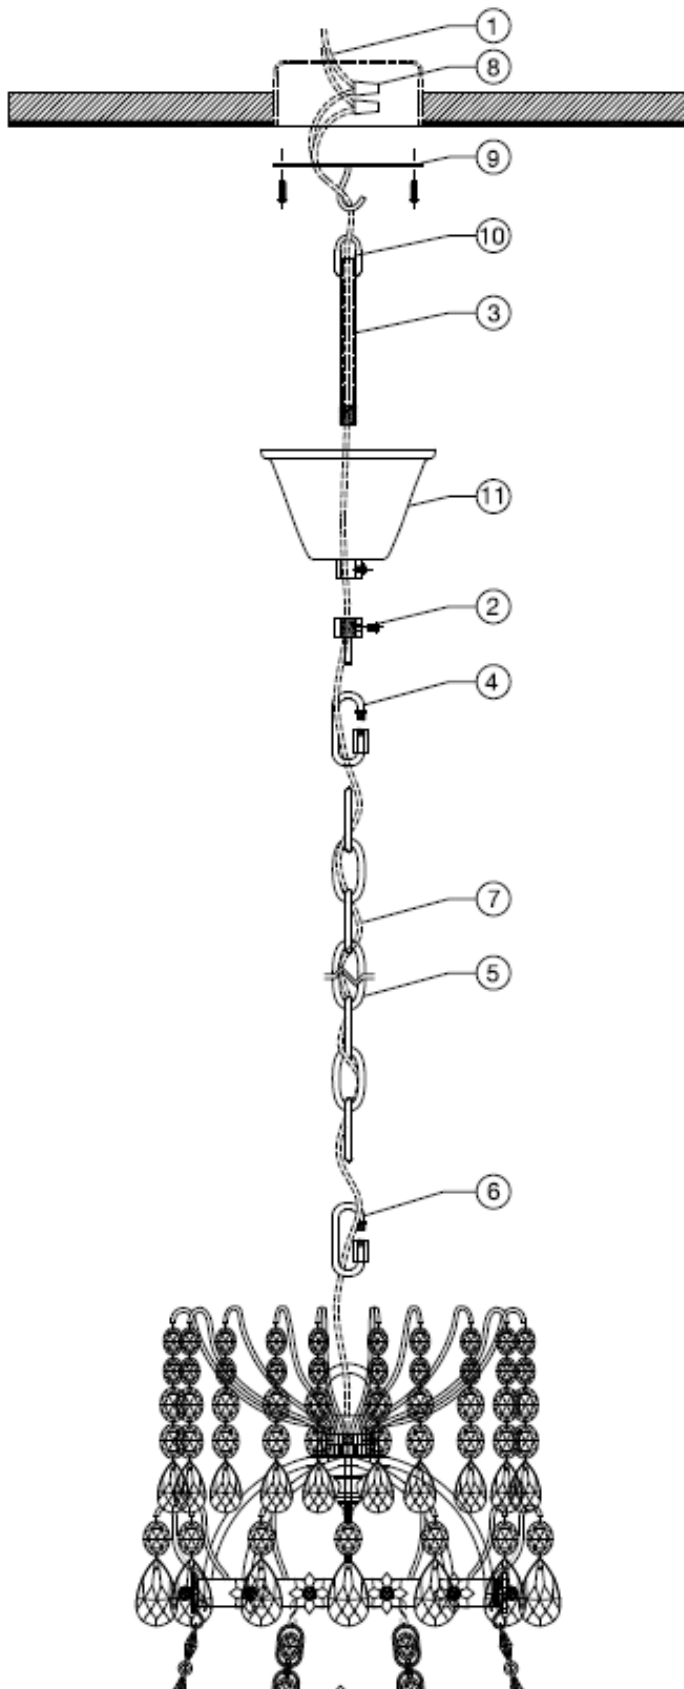


INSTALLATION INSTRUCTIONS









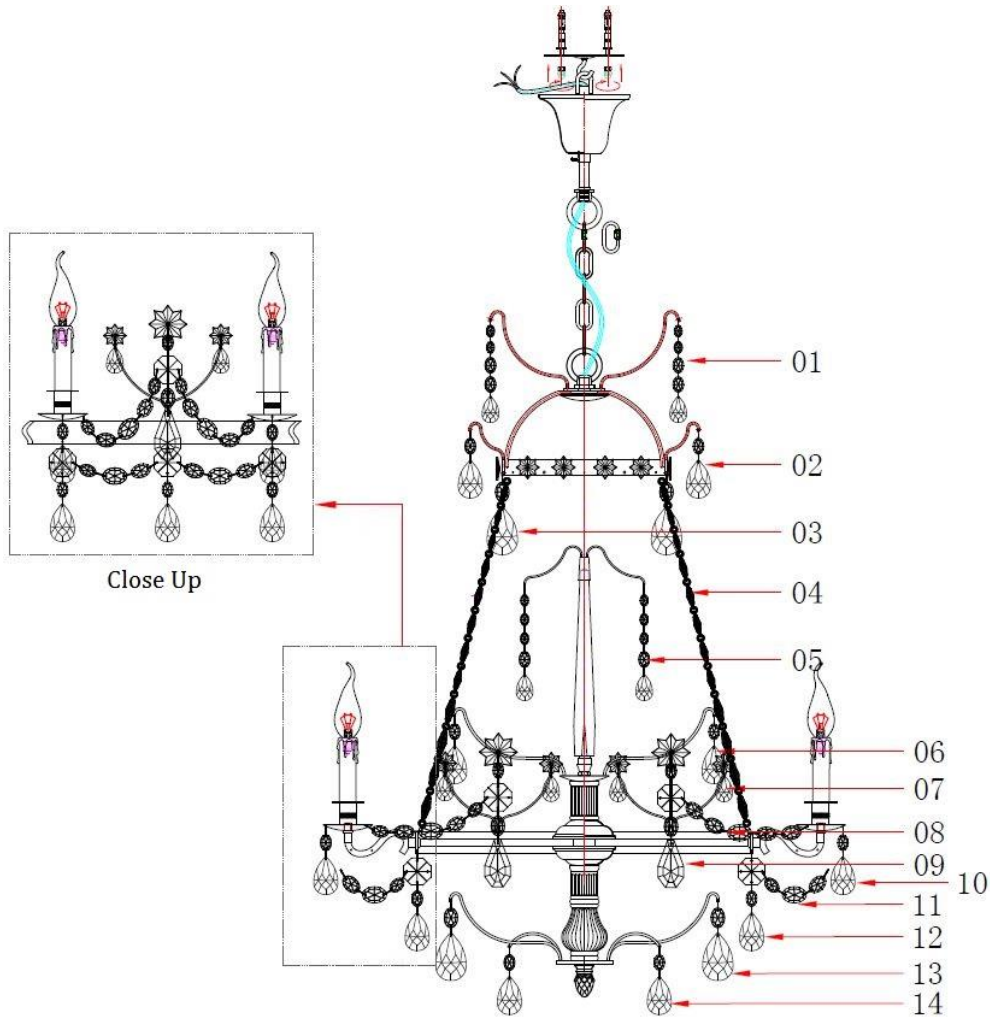





- 1 - SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER TO THE J-BOX.
- 2 - Loosen up screw on threaded loop. Twist off the loop allowing you to slip the IPS stud (#3) through the canopy. Once you complete step (#3), thread loop back onto stud.
- 3 - Feed threaded IPS stud through canopy collar.
- 4 - Connect quick link to the loop (#2) and to end of chain.
- 5 - Chain height can be custom by moving the bottom quick link (#6) up and down as necessary.
- 6 - Connect quick link at desired chain height and to the loop at top of chandelier frame.
- 7 - Feed electrical cable through the chain, canopy and match plate until reaching the J-box.
- 8 - Make proper electrical connections. This installation should be done by a qualified licensed electrician.
- 9 - Attach match plate / hook to J-box.
- 10 - Connect entire canopy, chain & chandelier frame to match plate / hook.
- 11 - Slide canopy up to ceiling line so that it covers the match plate and J-box, then tighten screw at the bottom collar.

UL LISTED

ELOQUENCE™

CRYSTALS & CONNECTIONS



<p>① 15#×2+21#×2 Oval bead</p>  <p>38# Net form 18 pcs</p>	<p>② 21#×1 Oval bead</p>  <p>50# Net form 12 pcs</p>	<p>③ 25#×1 Oval bead</p>  <p>63# Net form 6 pcs</p>	<p>④ 21#×4+25#×5+ 31#×3 Oval bead</p>  <p>6 pcs</p>	<p>⑤ 15#×3+21#×1 Oval bead</p>  <p>38# Net form 8 pcs</p>	<p>⑥ 21#×1 Oval bead</p>  <p>50# Net form 18 pcs</p>	<p>⑦</p>  <p>50# Net form 12 pcs</p>
<p>⑧ 21#×1+25#×1 +31#×1+25#×1 +21#×1 Oval bead</p>  <p>12 pcs</p>	<p>⑨ 21# Oval bead×1+ 36#Octagon bead×1 +25# Oval bead×1</p>  <p>63# Rhombus 6 pcs</p>	<p>⑩ 21#×1 Oval bead</p>  <p>50# Net form 6 pcs</p>	<p>⑪ 21#×1+31#×1+25#×1 Oval bead</p>  <p>12 pcs</p>	<p>⑫ 36#Octagon bead×1 +21# Oval bead×1</p>  <p>50# Net form 12 pcs</p>	<p>⑬ 25#×1 Oval bead</p>  <p>63# Net form 12 pcs</p>	<p>⑭ 21#×1 Oval bead</p>  <p>50# Net form 12 pcs</p>

CARE INSTRUCTIONS

To clean, wipe with a soft, dry cloth. Avoid the use of harsh chemicals or abrasive cleaners.

UL Listed, 25 watt max voltage.

Do not exceed wattage.



WWW.ELOQUENCE.COM
3601 Holdrege Ave.
Los Angeles, CA 90016
T: 310-876-0661 F: 310-876-0667
E: INFO@ ELOQUENCE.COM