



PARISA CHANDELIER

Assembly Instructions & Care

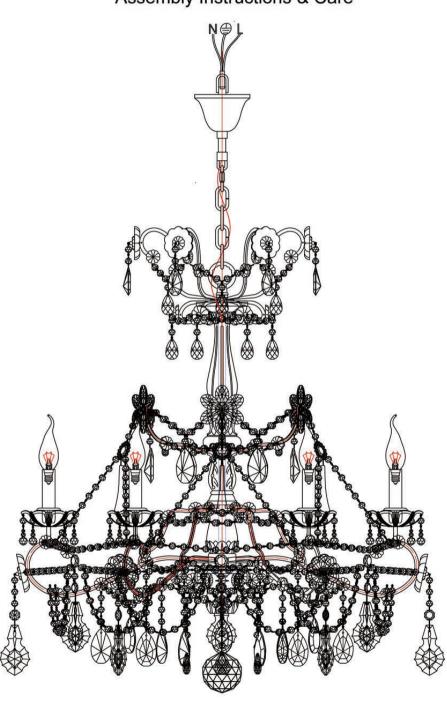

<u>ELOQUENCE</u>°


HARDWARE & ELECTRICAL

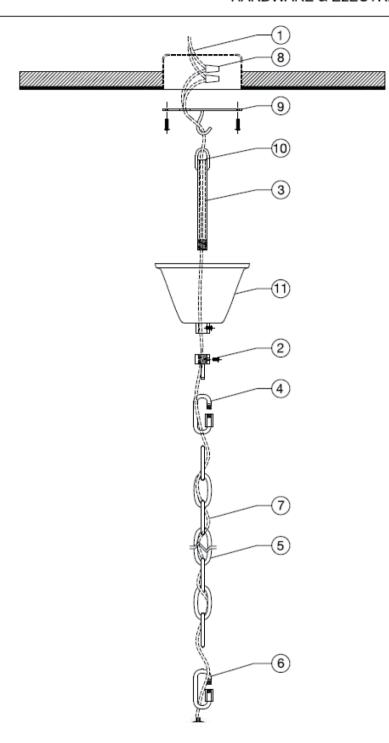

INSTALLATION INSTRUCTIONS

- 1 SHUT OFF THE MAIN ELECTRICAL SUPPLY ROM THE MAIN FUSE BOX/ CIRCUIT BREAKER TO THE J-BOX,
- 2 Loosen up screw on threaded loop. Twist off the loop allowing you to slip the IPS stud (#3) through the canopy. Once you complete step (#3), thread loop back onto stud.
- 3 Feed threaded IPS stud through canopy collar.
- 4 Connect quick link to the loop (#2) and to end of chain.
- 5 Chain height can be custom by moving the bottom quick link (#6) up and down as necessary.
- 6 Connect quick link at desired chain height and to the loop at top of chandelier frame.
- 7 Feed electrical cable through the chain, canopy and match plate until reaching the J-box.
- 8 Make proper electrical connections. This installation should be done by a qualified licensed electrician.
- 9 Attach match plate / hook to J-box.
- 10 Connect entire canopy, chain & chandelier frame to match plate / hook,
- 11 Slide canopy up to ceiling line so that it covers the match plate and J-box, then tighten screw at the bottom collar.

ELOQUENCE° CRYSTALS & CONNECTIONS

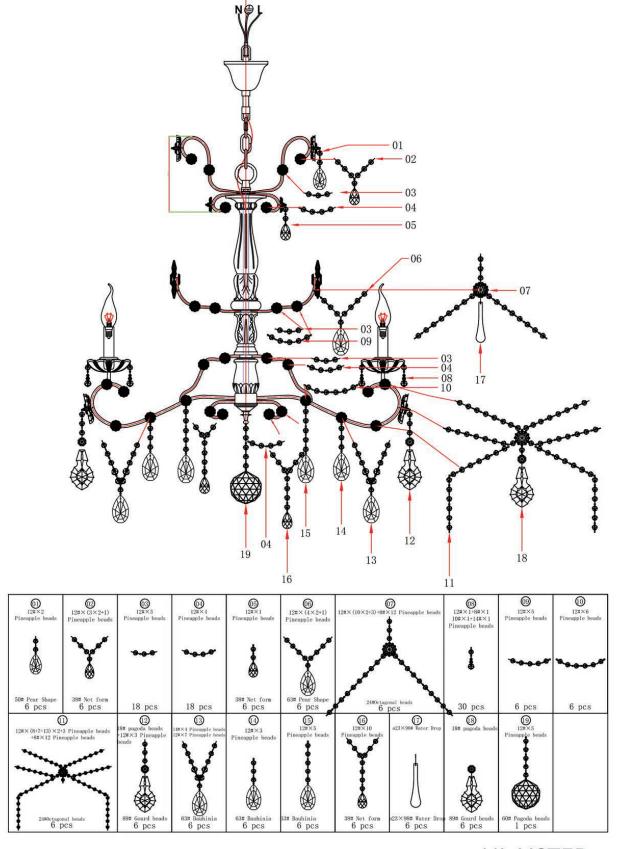

UL LISTED

CARE INSTRUCTIONS

To clean, wipe with a soft, dry cloth. Avoid the use of harsh chemicals or abrasive cleaners.

UL Listed, 25 watt max voltage.

Do not exceed wattage.



WWW.ELOQUENCE.COM
3601 Holdrege Ave.
Los Angeles, CA 90016
T: 310-876-0661 F:310-876-0667
E: INFO@ ELOQUENCE.COM